

Compact, Discreet Interior Domes

Compact dome camera for discreet, internal locations.

Metal cased Mini-dome with pinhole lens


Colour models with low power consumption

Ceiling or wall mounted

Simple alignment



D045-C

Sensor	Interline CCD
Exposure Control	Electronic
Voltage	12V DC 
AGC	Always on
Video Signal	Composite into 75Ω
Operating Temp.	-10 °C to +50 °C
Relative Humidity	85% Max. non-condensing
Housing	Internal use only


Connections

Power
Power to the camera is supplied via the 2.1 mm DC jack connector lead. Where cameras have integral lighting this is also powered through the DC jack.

Video
The video output lead is fitted with a Female BNC connector for easy connection to a co-axial, or other, video cable. Center pin is for signal. Sleeve is ground level.

The signal output is a standard PAL composite video signal.

Mode	Sensor	Resolution	Sensitivity	Power	Case	ORDER CODE
Colour	1/3" PAL	330 TVL	1.0 Lux	60 mA	Black Finish	D045-C
Colour	1/3" PAL	330 TVL	1.0 Lux	60 mA	Silver Finish	D045-C (S)

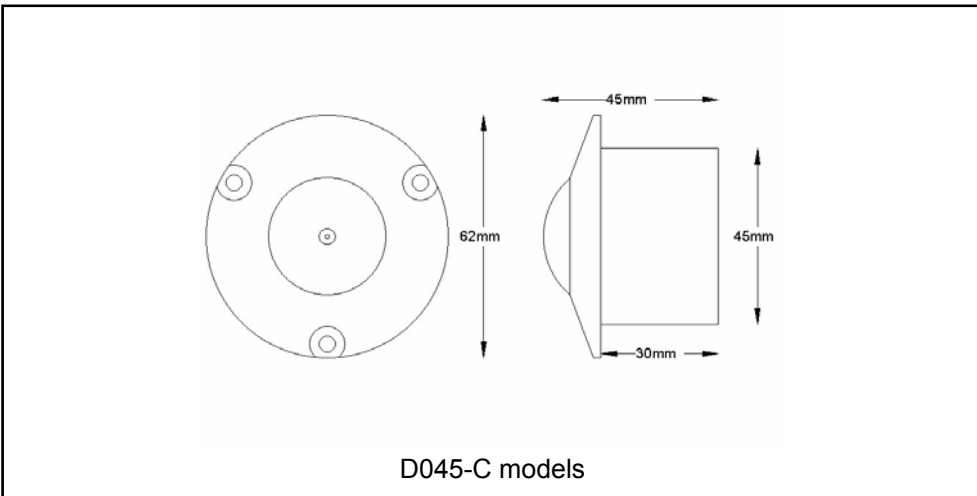

D045-C models

Lenses

Standard lens fit is a 3.7 mm pinhole type.

No lens alternatives available