

**P E C A N**

**Professional CCTV Products**



## **D051C Range Micro Dome Cameras**

Colour & Colour/Mono


- IP66 weatherproof exterior metal casing
- 3-axis gimble
- Low power consumption
- Discreet surveillance
- LED option available

### **APPLICATIONS**

Prestige discreet surveillance. Ideal for installation in transport applications as well as high-end domestic and retail environments.

**☎ 01279 419913**  
**[www.pecancctv.co.uk](http://www.pecancctv.co.uk)**

## D051C range Dimensions (mm)

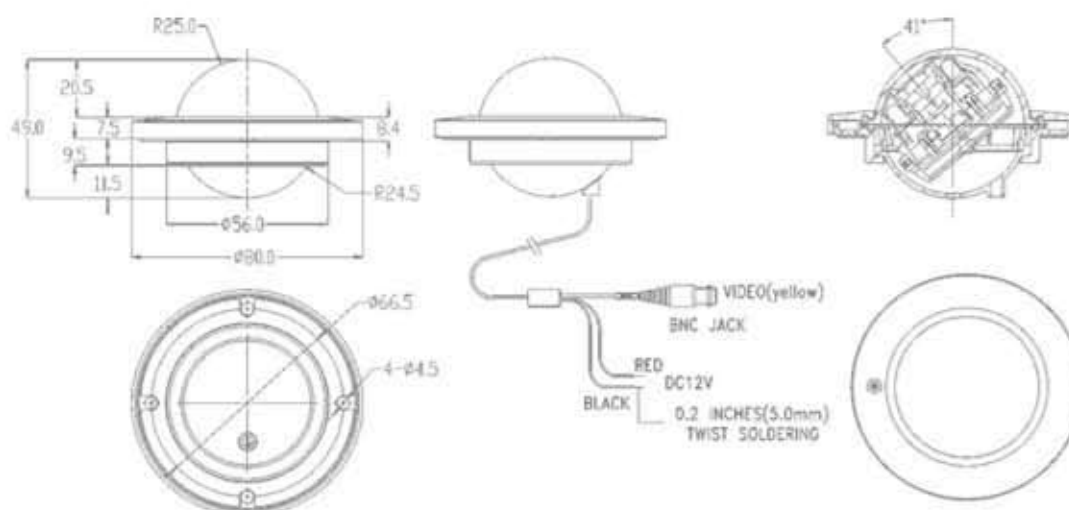

## Technical data

Video output	Composite video 75 Ohms
Exposure control	Electronic
Lens	3.6mm standard fixed type*
Audio output	n/a
Operating temperature	-10 to +55°C
Voltage	12v DC (8-18v DC)
Weight	310g

\* Other lens options available - please contact our sales team for further details

The D051C is supplied with a flying lead for connecting to a power supply and monitor system. Yellow BNC = video signal. Red wire = 12v DC+. Black wire = 0v DC/video grid.

Mode	Colour
Sensor	1/3" CCD

## Order information

Body	Resolution	Sensitivity	Power	Code
Chrome	330 TVL	0.4/0.0 Lux @F1.2	1.8W/215 mA	D051CML(S)
Black	330 TVL	0.4/0.0 Lux @F1.2	1.8W/215 mA	D051CML
Chrome	450 TVL	0.8/0.0 Lux @F1.2	2.0W/240 mA	D051CMHL(S)
Black	450 TVL	0.8 /0.0 Lux @F1.2	2.0W/240 mA	D051CMHL
Chrome	330 TVL	0.4 Lux @F1.2	0.7W/85 mA	D051C(S)
Black	330 TVL	0.4 Lux @F1.2	0.7W/60 mA	D051C
Chrome	450 TVL	0.8 Lux @F1.2	0.8W/95 mA	D051CH(S)
Black	450 TVL	0.8 Lux @F1.2	0.8W/95 mA	D051CH

We recommend the use of a 1000 mA power supply with this item PSU1210R

Whilst every effort has been made to ensure the accuracy of the information provided, no liability can be accepted for any errors or omissions. All dimensions are approximate. Stortech Electronics Ltd reserves the right to alter the specification and introduce changes without prior notice.

## PECAN CCTV

Tel: 01279 419913

Email: [sales@pecancctv.com](mailto:sales@pecancctv.com)

Fax: 01279 419925

[www.pecancctv.com](http://www.pecancctv.com)