

P E C A N

Professional CCTV Products



PSU1210R/PSU121REU
Miniature Power Supply
12v DC

- Small, lightweight, versatile switch mode in-line power supply
- Low profile encapsulated case
- Supplied complete with 1.8m mains lead and 1.5m power lead to 2.1mm jack plug
- Short circuit and thermal overload protection
- Easy to install


APPLICATIONS

Ideal for powering all types of CCTV cameras. Suitable for use across the entire Pecan camera range - including high-end PC960 with IR LEDs.

☎ 01279 419913
www.pecancctv.co.uk

PSU1210R/PSU1210REU Dimensions (mm)

Length	94mm
Width	43.5mm
Height	31mm

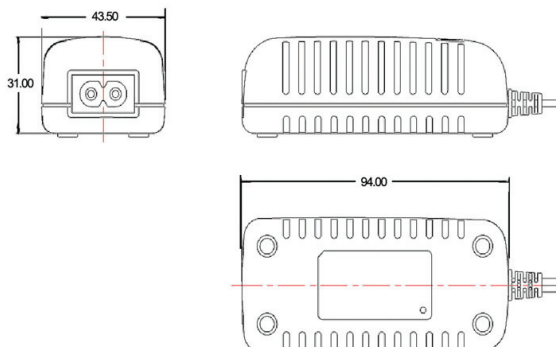

Technical data

INPUT

Rated input voltage	100-240v AC
Operating range	90-264v AC
Rated input frequency	50/60Hz +/- 3Hz
Rated input current	0.4A maximum
Maximum input power	16W
Input current (no loading)	< 25mA
Power consumption (no loading)	Maximum 0.5W
Primary current protection: An adequate internal fuse on the AC input line is provided.	

OUTPUT

Nominal DC output voltage	+ 12.0v
Minimum load current	0.0A
Rating load current	1.0A
Operating temperature	0°C - +40°C
Operating humidity	10%-90% (non-condensing)

Approvals	UK-EN60950 CE UL TUV CSA RoHS
-----------	----------------------------------

Order information

Specification	Code
UK 3 pin plug for mains voltage connection	PSU1210R
Europe 2 pin plug for mains voltage connection	PSU1210REU

Whilst every effort has been made to ensure the accuracy of the information provided, no liability can be accepted for any errors or omissions. All dimensions are approximate. Stortech Electronics Ltd reserves the right to alter the specification and introduce changes without prior notice.

PECAN CCTV

Tel: 01279 419913 **Fax: 01279 419925**
Email: sales@pecancctv.co.uk **www.pecancctv.co.uk**